



## SPECIFICATION

Description:

30 Degree 5mm Round LITEFO Lamp  
in Amber Color with White Diffused  
Lens and No Stopper

Dice Material: AlGaInP


MODEL No : FC530BAYL21



Confirmed  
by Customer: \_\_\_\_\_

Date: \_\_\_\_\_

## Dimension Drawing

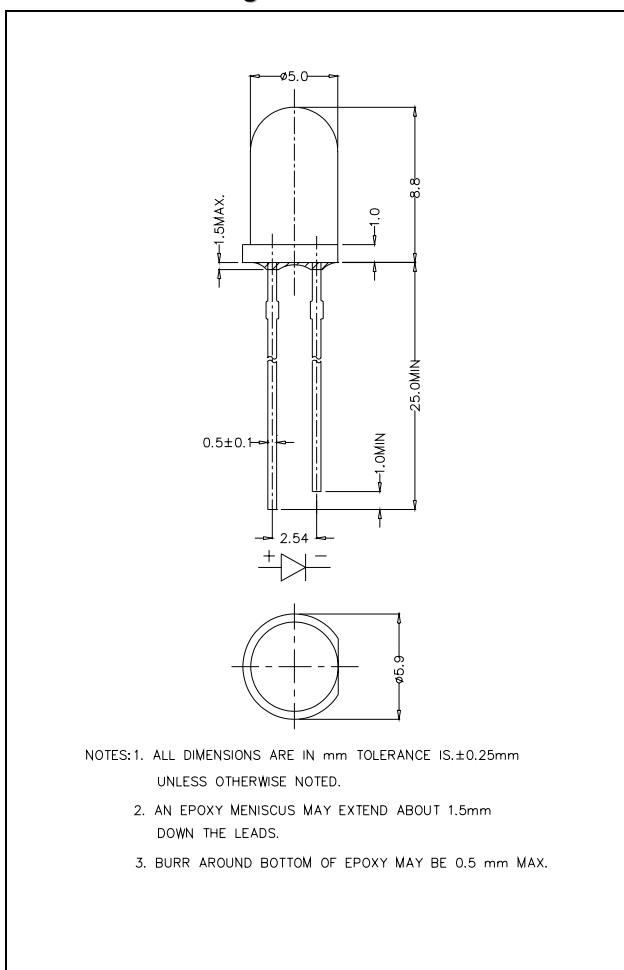

## Applications

- Advertising Signs
- Indicators
- Traffic
- Automotive Lighting

## Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$

Items	Symbol	Absolute maximum Rating	Unit
Forward Current <sup>*2</sup>	$I_F$	50	mA
Peak Forward Current <sup>*1</sup>	$I_{FP}$	200	mA
Reverse Voltage	$V_R$	5	V
Power Dissipation	$P_D$	130	mW
Operation Temperature	$T_{opr}$	$-40 \sim +95$	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	$-40 \sim +100$	$^\circ\text{C}$
Lead Soldering Temperature	$T_{sol}$	Max. $260^\circ\text{C}$ for 3 sec Max. (3mm from the base of the epoxy bulb)	
Electrostatic Discharge Classification (MIL-STD-883E)	ESD	Class 1	

\*1 pulse width  $\leq 0.1\text{msec}$  duty  $\leq 1/10$

\*2 For long term performance the drive currents between 10mA and 30mA are recommended. Please contact LITEFO sales representative for more information on recommended drive conditions.

## Typical Electrical & Optical Characteristics ( $T_a = 25^\circ\text{C}$ )

Items	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	$V_F$	$I_F = 20\text{mA}$	---	2.1	2.6	V
Reverse Current	$I_R$	$V_R = 5\text{V}$	---	---	100	$\mu\text{A}$
Dominant Wavelength	$\lambda_D$	$I_F = 20\text{mA}$	584	591	596	nm
Luminous Intensity	$I_v$	$I_F = 20\text{mA}$	3000	4500	---	mcd
50% Power Angle	$2\theta_{1/2}$ H-H	$I_F = 20\text{mA}$	---	30	---	deg


### Standard bins for FC530BAYL21 ( $I_F = 20\text{mA}$ ):

Lamps are sorted to Luminous Intensity –  $I_V$ ,  $V_F$  & Dominant Wavelength –  $\lambda_D$  bins shown.

Orders for FC530BAYL21 may be filled with any or all bins contained as below.

All Luminous Intensity –  $I_V$ ,  $V_F$  & Dominant Wavelength –  $\lambda_D$  values shown and specified are at  $I_F = 20\text{mA}$ .

\* **W+**

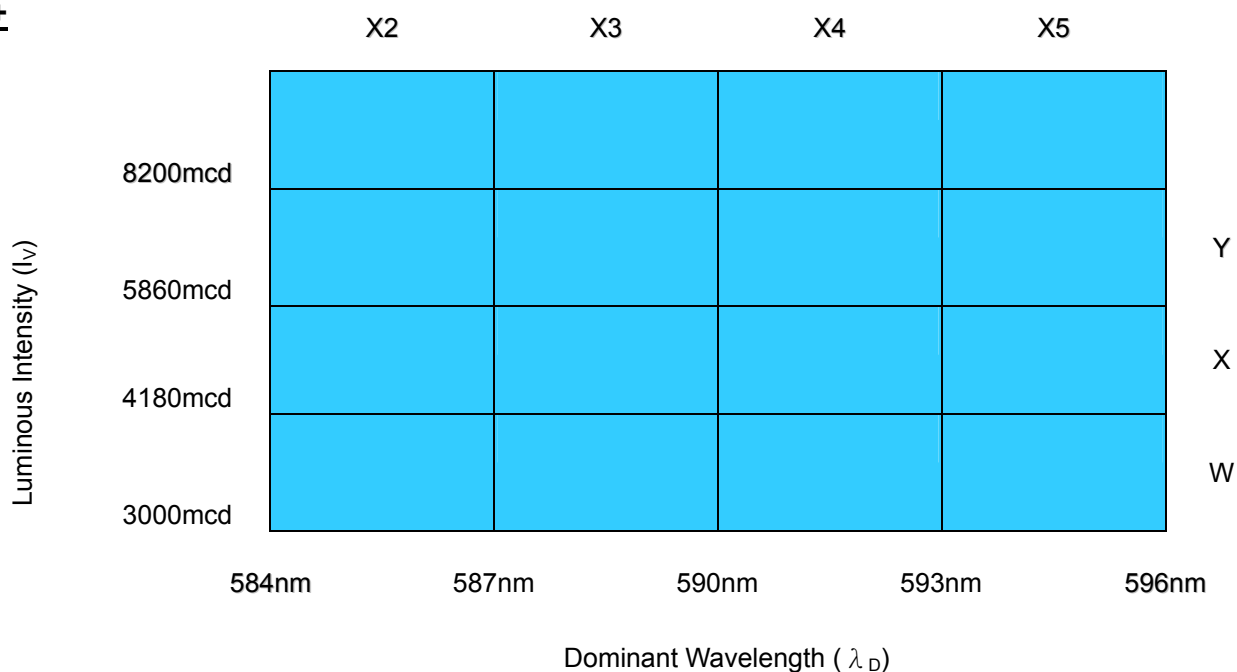

\* W+ indicates Luminous Intensity is at W bin or above.

### Forward Voltage ( $V_F$ )

Rank	V1	V2	V3	V4	V5
Voltage	1.6-1.8V	1.8-2.0V	2.0-2.2V	2.2-2.4V	2.4-2.6V

### Important Notes:

- 1) All ranks will be included per delivery, rank ratio will be determined by LITEFO.
- 2) Pb content <1000PPM.
- 3) Tolerance of measurement of luminous intensity is  $\pm 15\%$ .
- 4) Tolerance of measurement of dominant wavelength is  $\pm 1\text{nm}$ .
- 5) Tolerance of measurement of  $V_f$  is  $\pm 0.05\text{ V}$ .

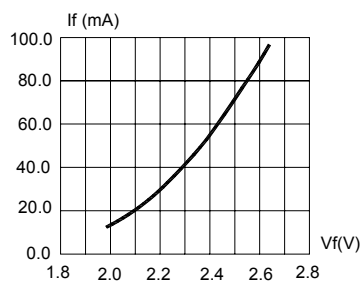


FIG.1 FORWARD CURRENT VS. FORWARD VOLTAGE.

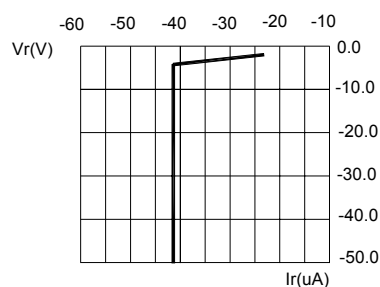


FIG.2 REVERSE CURRENT VS. REVERSE VOLTAGE.

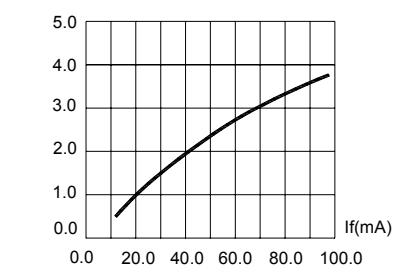


FIG.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT.

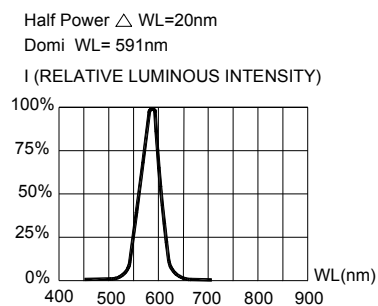


FIG.4 RELATIVE LUMINOUS INTENSITY VS. WAVELENGTH.

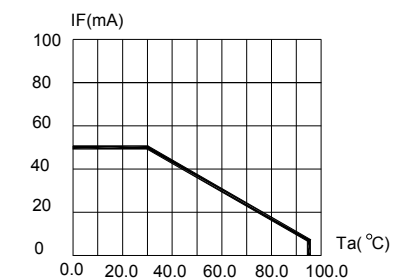


FIG.5 MAXIMUM FORWARD DC CURRENT VS AMBIENT TEMPERATURE (Tjmax=105°C)

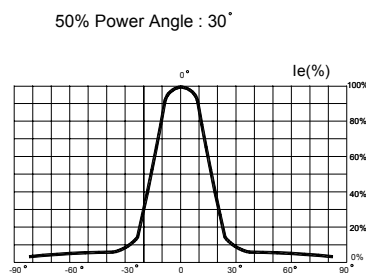


FIG.6 FAR FIELD PATTERN

Items	Signatures	Date	Revision History	
Prepared by	Lois	2004/10/07	DOC. No.	CHANGE DESCRIPTION
Checked by	Jarvis	2004/10/07	02 07Oct04	Add Notes; Change FIG.1&3&5
Approved by	D.W.Liu	2004/10/07		
ECN#	ECN-H20040274			

Data is subject to change without prior notice.

Obsoletes Doc: A 10Jun04.